


Surge-Trap® K - K1 PV

Photovoltaic & Energy Storage SPDs
DIN RAIL - IEC TYPE 1+2 PV

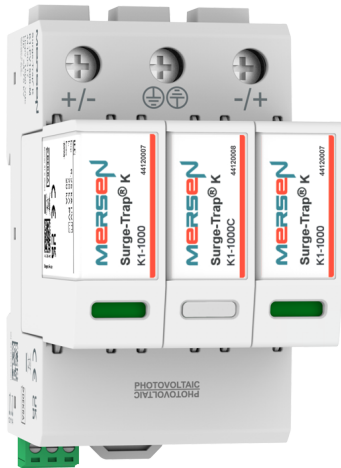

General Data

Internal configuration	+, -, PE
No. Poles	3-Pole
No. DIN rail modules	3
Network configuration	YPV
IEC SPD Type	Class I+II
EN SPD Type	PV Type 1+2
UL SPD Type	Type 1 Component Assembly
Format	Pluggable
Protection Modes	L+/PE, L-/PE, L+/L-
Product standards	IEC/EN 61643-31; UL 1449 5th Edition



PART NUMBERS

XXXX	1000	1500
K1-PVXXXX	44120312	44120316
K1-PVXXXX-M (with Microswitch)	44120313	44120317

SURGE PROTECTION DEVICE (SPD) - IEC TECHNICAL FEATURES

K1-PVXXXX, K1-PVXXXX-M (with Microswitch)	1000	1500
Maximum continuous operating voltage (DC) - Ucpv [V]	1170	1500
Nominal discharge current (8/20)- In [kA]		20
Max Discharge Current (8/20) - Imax [kA]		50
Lightning impulse current (10/350) - Iimp [kA]	6.25	5
Voltage protection level at In - Up [kV]	≤4	≤5
Voltage protection level at In - Up (L-PE) [kV]	≤4	≤5
Short Circuit Withstand- Iscpv [kA]		20
Total discharge current (8/20) - Itotal [kA]		50
Total discharge current (10/350) - Itotal	12.5	10
Response time - tA [ns]		≤25
Dynamic thermal disconnection		Yes
No. of ports		1

SURGE PROTECTION DEVICE (SPD) - UL TECHNICAL FEATURES

K1-PVXXXX, K1-PVXXXX-M (with Microswitch)	1000	1500
Nominal discharge current (8/20) - In [kA]		20
Maximum continuous operating voltage - MCOV (DC+ DC-) [V]	1170	1500
Maximum continuous operating voltage - MCOV (DC+ G) [V]	1170	1500
Voltage protection rating - VPR (DC- G) [V]	3000	4000
Voltage protection rating - VPR (DC+ DC-) [V]	3000	4000
Voltage protection rating - VPR (DC+ G) [V]	3000	4000
Short-Circuit Current Rating-SCCR [kA]	50	65

DATASHEET


This document is subject to change at any time without notice www.mersen.com | Lepanto 49 · 08223 Terrassa, Barcelona Spain © 2025 Cirprotec SLU | All rights reserved




Surge-Trap® K - K1 PV

Photovoltaic & Energy Storage SPDs
DIN RAIL - IEC TYPE 1+2 PV

MECHANICAL AND ENVIRONMENTAL FEATURES		
K1-PVXXXX, K1-PVXXXX-M (with Microswitch)	1000	1500
Temperature range [°C]	-40 ... 85	
Humidity range [%]	5 ... 95	
Max. Altitude [m]	2000	
Indication System Type	Green (OK) / Not green (replace)	
Insulating material	PA6 CT1 & PA66 CT1	
Housing color	Grey RAL 7035	
Enclosure - IP	IP20	
Flammability class	UL94 V-0	
Solid conductor cross section	1,5...35 mm²	
Stranded conductor cross section	1,5...25 mm²	
Torque rating [N m]	3	
Remote indication conductor cross section [mm²]	0.5 ... 1.5	
Remote indication switching capacity [V/A]	AC: 250/0.5 DC: 30/1	
Remote Indication Torque [N m]	3	

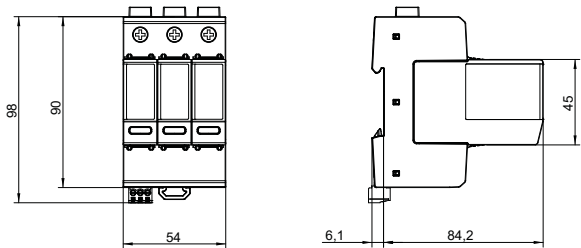
DIMENSIONS AND WEIGHT		
	K1-PVXXXX K1-PVXXXX-M (with Microswitch)	10001500
	Net Weight [kg]	0.480.52
	Gross weight [kg]	0.510.55
	Packaging dimensions (H x W x L) [mm]	118 x 59 x 97

INTERNAL CONFIGURATION		
	REPLACEMENT CARTRIDGES	
	K1-PVXXXX K1-PVXXXX-M (with Microswitch)	10001500
	K1-XXXX	4412000744120009
	K1-XXXX C	4412000844120010

DATASHEET

Surge-Trap® K - K1 PV L

Photovoltaic & Energy Storage SPDs
DIN RAIL - IEC TYPE 1+2 PV

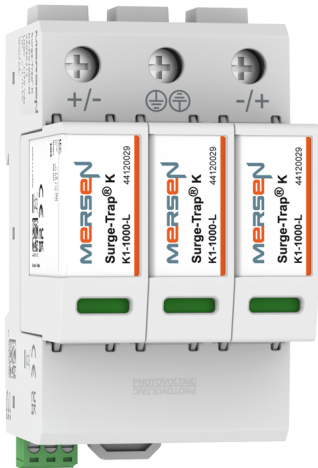

General Data

Internal configuration	+, -, PE
No. Poles	3-Pole
No. DIN rail modules	3
Network configuration	YPV
IEC SPD Type	Class I+II
EN SPD Type	PV Type 1+2
Format	Pluggable
Protection Modes	L+/PE, L-/PE, L+/L-
Product standards	IEC/EN 61643-31



PART NUMBERS		
XXXX	1000	1500
K1-PVXXXX-L	44120338	44120336
K1-PVXXXX-LM (with Microswitch)	44120339	44120337

SURGE PROTECTION DEVICE (SPD) - IEC TECHNICAL FEATURES		
K1-PVXXXX-L, K1-PVXXXX-LM (with Microswitch)	1000	1500
Maximum continuous operating voltage (DC) - Ucpv [V]	1170	1500
Nominal discharge current (8/20)- In [kA]	20	
Max Discharge Current (8/20) - Imax [kA]	50	
Lightning impulse current (10/350) - Iimp [kA]	5	
Voltage protection level at In - Up [kV]	≤4	≤5
Voltage protection level at In - Up (L-PE) [kV]	≤4	≤5
Short Circuit Withstand- Iscpv [kA]	20	
Total discharge current (8/20) - Itotal [kA]	50	
Total discharge current (10/350) - Itotal	5	
Response time - tA [ns]	≤25	
Dynamic thermal disconnection	Yes	
No. of ports	1	

MECHANICAL AND ENVIRONMENTAL FEATURES		
K1-PVXXXX-L, K1-PVXXXX-LM (with Microswitch)	1000	1500
Temperature range [°C]	-40 ... 85	
Humidity range [%]	5 ... 95	
Max. Altitude [m]	2000	
Indication System Type	Green (OK) / Not green (replace)	
Insulating material	PA6 CT1 & PA66 CT1	
Housing color	Grey RAL 7035	
Enclosure - IP	IP20	
Flammability class	UL94 V-0	
Solid conductor cross section	1,5...35 mm²	

DATASHEET

This document is subject to change at any time without notice www.mersen.com | Lepanto 49 · 08223 Terrassa, Barcelona Spain © 2025 Cirprotec SLU | All rights reserved




Surge-Trap® K - K1 PV L

Photovoltaic & Energy Storage SPDs
DIN RAIL - IEC TYPE 1+2 PV

Continue K1-PVXXXX-L, K1-PVXXXX-LM (with Microswitch)


K1-PVXXXX-L, K1-PVXXXX-LM (with Microswitch)	1000	1500
Stranded conductor cross section	1,5...25 mm²	
Torque rating [N m]	3	
Remote indication conductor cross section [mm²]	0.5 ... 1.5	
Remote indication switching capacity [V/A]	AC: 250/0.5 DC: 30/1	
Remote Indication Torque [N m]	3	

DIMENSIONS AND WEIGHT

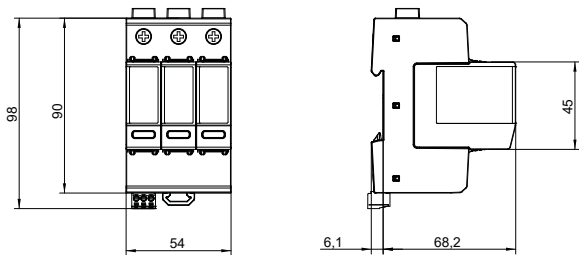

K1-PVXXXX-L K1-PVXXXX-LM (with Microswitch)	1000	1500
Net Weight [kg]	0.348	
Gross weight [kg]	0.369	
Packaging dimensions (H x W x L) [mm]	118 × 59 × 97	

INTERNAL CONFIGURATION



REPLACEMENT CARTRIDGES

K1-PVXXXX-L K1-PVXXXX-LM (with Microswitch)	1000	1500
K1-XXXX-L	44120029	44120028

DATASHEET

This document is subject to change at any time without notice www.mersen.com | Lepanto 49 · 08223 Terrassa, Barcelona Spain © 2025 Cirprotec SLU | All rights reserved

