

DSM5 MODELS

SIL3 PLe INCREMENTAL ENCODERS

Introduction

When an automation system requires a high degree of risk mitigation of failure modes, often times Functional Safety equipment can be a part of the solution. Sensata | BEI Sensors offers a wide range of Functional Safety encoders to fit most any application or electrical interface requirement. Rated at SIL3 (PLe), these encoders allow safe operation in set-up, production and maintenance modes, significantly reducing operational risks. All encoders have the option of a Digital HTL or TTL operation as an alternative to the Sine/Cosine outputs found on most Functional Safety encoders. This makes them a compatible replacement for existing encoders when migrating to a higher safety level of operation. The DSM5 series features a shafted mounting and is also available in a stainless steel version that is IP69K sealed for washdown applications. Both have a body diameter of 58mm.



DSM5H



DSM5X

Features

- Usable up to SIL3 and Cat.4 / PLe according to IEC 61508 / EN ISO 13849
- Suitable for safe motor feedback according to IEC 61800-5-2
- Robust and excellent resistance to shock and vibration
- High protection level: IP65
- High temperature performance -20°C to +85°C
- 58mm standard size encoder
- Multiple shaft configurations:
Solid shaft: 6mm, 9.52mm or 10mm (DSM5H)
Other shaft configurations available (blind, through, tapered)
- IP69K Stainless steel housing option (DSM5X)
- Wide choice of connection configurations
- Power supply 5Vdc or 11 - 30Vdc
- Digital TTL/RS422, HTL or sine/cosine 1Vpp output
- Resolutions up to 2500ppr

Applications

- Industrial automation
- Automated guided vehicles
- Mills for lumber, steel and other metals
- Printing and packaging equipment
- Food processing equipment
- Forming and die presses

SPECIFICATIONS

Mechanical

	DSM5H	DSM5X
Material	Cover: coated zinc alloy Body: aluminum Shaft: AISI 303 stainless steel	Cover: AISI 316 stainless steel Body: AISI 316 stainless steel Shaft: AISI 316 stainless steel
Bearings	6000 series - sealed	6000 series - protected by hybrid rotary seal
Maximum Loads	Axial: 40 N Radial: 80 N	Axial: 100 N Radial: 200 N
Shaft Inertia	< 2,800 g.mm ²	< 2,500 g.mm ²
Static/Dynamic torque	5 / 35 mN.m	10 / 45 mN.m
Permissible max. speed	9,000 RPM	6,000 RPM

Continuous max. speed	6,000 RPM	3,000 RPM
Theoretical mechanical lifetime L_{10h} ^(A)	> 29.7 X 10 ⁹ turns / 82,365 hours	> 4.71 X 10 ⁹ turns / 26,150 hours
Encoder weight (approx.)	0.30 kg	0.75 kg

^(A) **Continuous max. speed** – ½ max. load – according to **ISO 281**: 1990, L_{10}

Electrical Characteristics / Functional Safety Parameters ^(B)

Electronic Version	Output signals	Operating Voltage +V	Supply current	Current per channel pair	Short circuit protected	Reverse polarity protected	PFD	PFH	MTTFd	DC
2G2	Digital TTL RS422	5V +/-5% ^(C) --- 250mA	100mA with no load	40mA	Yes	Yes	7.51E-05	8.58E-10	1331	HIGH
5G2		11-30V ^(C) --- 250mA			Not to +V		9.52E-05	1.09E-09	1050	
5G5	Digital HTL				Yes		9.52E-05	1.09E-09	1050	
2WT	Sine Cosine 1Vpp	5V +/-5% ^(C) --- 250mA	70mA with no load	10mA	Yes		4.29E-05	4.90E-10	2328	
5WT		11-30V ^(C) --- 250mA			Not to +V		6.60E-05	7.53E-10	1515	

^(B) Safety mission time: 20 years

^(C) Device must be supplied by a Class 2, LPS or SELV/PELV limited energy source ≤60V.

Environmental & Standards Conformity

	DSM5H	DSM5X
Protection (EN 60529)	IP65	IP68/69K
Salt Spray (EN 60068-2-11 part 2)	96h	168h
Humidity (EN 60068-2-38)	93% @ 65°C	
Shock (EN 60068-2-27)	≤ 500m.s ⁻² (6 ms, half sine)	
Vibration (EN 60068-2-6)	≤ 200m.s ⁻² (55 ... 2 000 Hz)	
Operating temperature	-20 to 85°C (encoder T°)	
Storage temperature	-20 to 85°C	
EMC Immunity Test	EN 61000-6-2, increased levels	
EMC Emission Test	EN 61000-6-4, increased levels	
Isolation	1000 Veff	
Functional safety	IEC 61508	
	IEC 62061	
	ISO 13849-1	
	IEC 61800-5-2	
Encoders usable up to SIL3 / PLe with specific requirements, see safety user manual for details.		
Z and Z/ are not safety signals.		



STANDARD CONNECTIONS

DSM5H connections

		0V	+V	A or S	B or C	Z	A/ or S/	B/ or C/	Z/	Ground
G6	M23 - 12 pins CW	1	2	3	4	5	6	7	8	Connector body
G8	M23 - 12 pins CCW	10 + 11	2 + 12	8	5	3	1	6	4	Connector body
G3	PVC cable 8 wires 8230/020	WH white	BN brown	GN green	YE yellow	GY grey	PK pink	BU blue	RD red	General shielding
GP	PUR cable 12 wires 8230/050	WH white + WH/GN white /green	BU blue + BN/GN brown / green	GY grey	BN brown	RD red	PK pink	GN green	BK black	General shielding
U3	PVC cable 8 wires	WH	BN	GN	YE	GY	PK	BU	RD	General shield
GC	PUR cable	BK	RD	GN	BN	VT	YE	OG	BU	General shield
GM	M12 8 pins	1	2	3	4	5	6	7	8	Connector body

Note: All connections are UL certified, except G3 and GP

DSM5X connections

Type	Cable	0V	+V	A or S	B or C	Z	A/ or S/	B/ or C/	Z/	Ground
TE	8230/005	WH white	BN brown	GN green	YE yellow	GY grey	PK pink	BU blue	RD red	General shielding

Note: TE connection is not UL certified



RESOLUTIONS


250 256 360 500 512 1000 1024 1500 2000 2048 2500




DIMENSIONS

All dimensions are in mm


DSM5H10 - Solid shaft 10mm - M23 connector - Radial

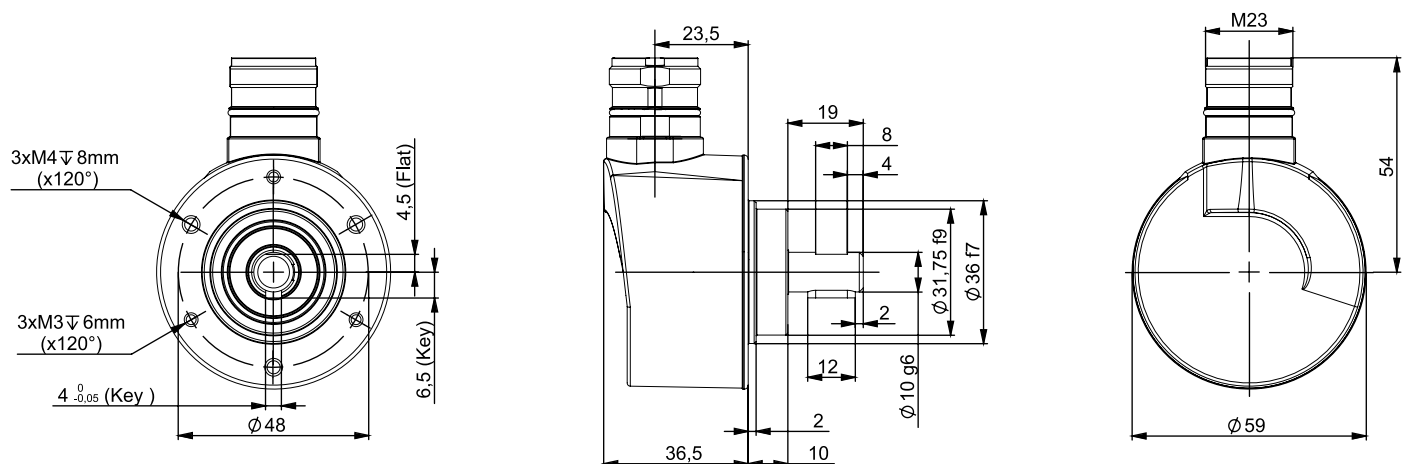


DSM5H06 - Solid shaft 6mm - M23 connector - Axial

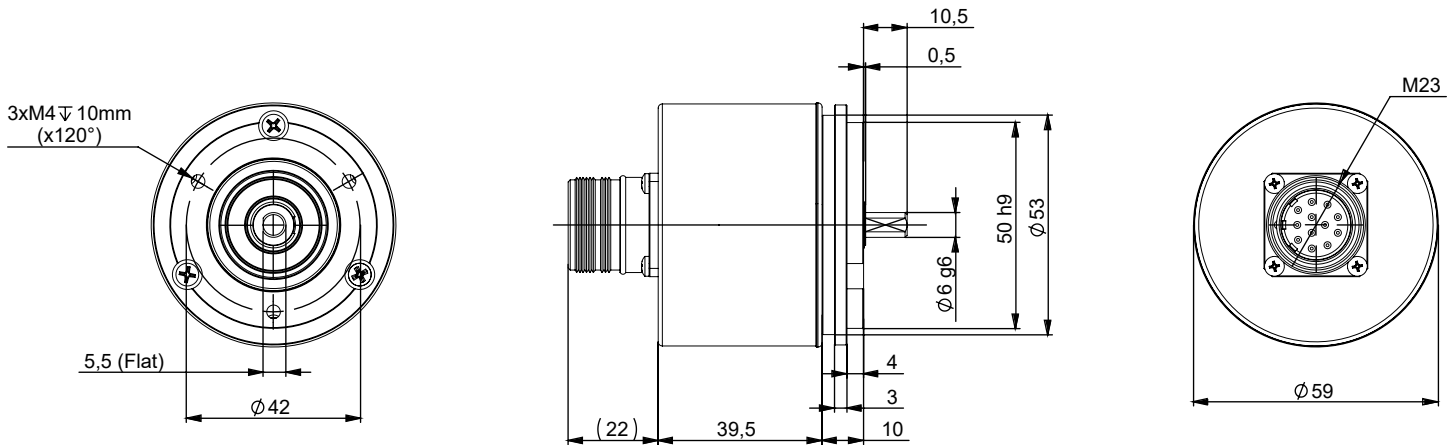


DSM5X10 - Solid shaft 10mm – Cable output radial

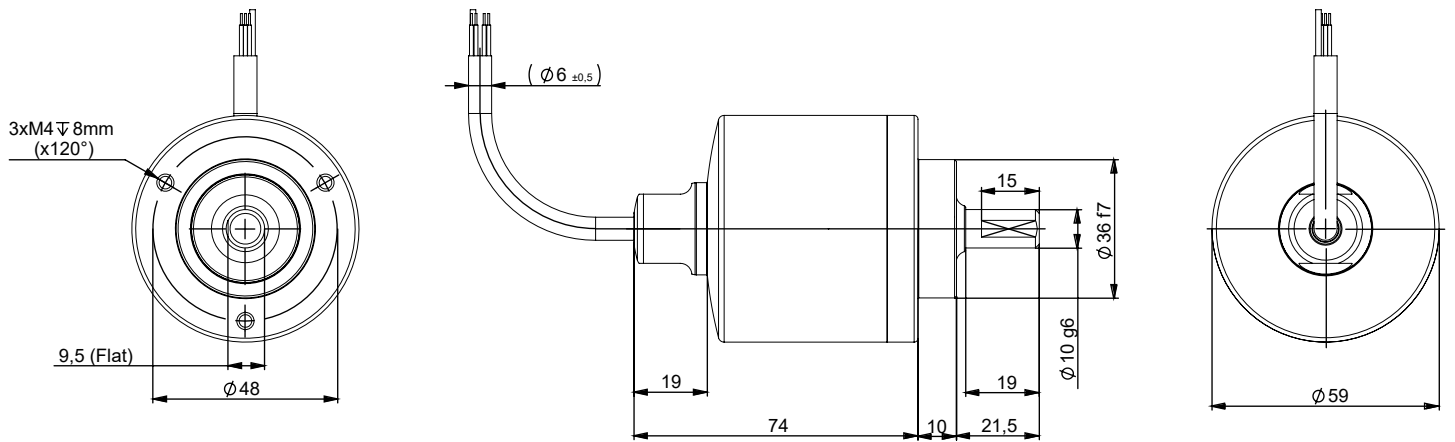


**M12
GMR**




**Cable
U3R, GCR**




**M23
G6R, G8R**




**Cable
G3R, GPR, TER**




**M12
GMA**



**Cable
G3A, U3A,
GPA, GCA**



**M23
G6A G8A**



GENERAL NOTES

For a safe installation according to the required safety level needed in the application, refer to the user safety User Manual. The safety User Manual provides the technical information (drawings, electrical data, etc...) for a safe integration. A quick installation guide is provided with each encoder for use by the technician who installs the device on the equipment.



ORDERING OPTIONS

Example : DSM5H10 // 5G59 // 01024 // GPR050 // CS03**

Contact the factory for special versions, ex: resolution, connection, flange...

	DSM5H	10	//	5G5	9	//	01024	//	GP	R	050	//	CS03**
Family													
DSM5H: Aluminum housing DSM5X: Stainless steel housing													
Shaft													
06 = 6 mm (not available in DSM5X models) 10 = 10 mm E3 = 9.52mm (not available in DSM5X models)													
Voltage Output													
2G2: 5Vdc, TTL RS422 5G2: 11- 30Vdc, TTL RS422 5G5: 11- 30Vdc, HTL 2WT: 5Vdc, Sine 1 Vpp (analog) 5WT: 11- 30Vdc, Sine 1 Vpp (analog)													
Channels													
9: Digital electronics AA/ BB/ ZZ/ B before A, CW viewed from flange side Z gated A&B N: Analog electronics SS/ CC/ ZZ/ C before S, CW viewed from flange side Z ungated Contact factory for other configurations													
Resolution													
250, 256, 360, 500, 512, 1000, 1024, 1500, 2000, 2048, 2500													
Output Termination													
DSM5H G6: M23 12 pins CW G8: M23 12 pins CCW GM: M12 8 pins GP: PUR cable 12 wires G3: PVC cable 8 wires U3: PVC Cable 8 wires GC: PUR cable 8 wires DSM5X TE: Silicone Cable 8 wires													
Output Orientation													
R: Radial A: Axial													
Cable Length													
xxx: Cable Length (ex.: 020 = 2 Meters) Blank: No Cable													
Accessories*													
*****: No accessory CS****: Key for keyway (not available for DSM5H06 model) **03**: 9500/003 Servo flange (for DSM5H06 model only) CS03**: Key + Servoflange (not available for DSM5H06 model)													

* Parts mounted on encoder



AGENCY APPROVALS & CERTIFICATIONS






BEI Sensors SAS Sensata Technologies

Espace Européen de l'Entreprise
9, rue de Copenhague
B.P. 70044 Schiltigheim
F 67013 Strasbourg Cedex

Tél : +33 (0)3 88 20 80 80
Fax : +33 (0)3 88 20 87 87
Mail : position-info.eu@sensata.com
Web : www.sensata.com



ACCESORIES

Description	Part Number
Square shaft keys 	9435/006 = 4mm x 12mm
Safety Bellows Couplings For 10mm shaft 	9404/S/10-10
Standard Mating Connector 2m, 5m, 10m Mating Cable Assembly Other lengths from 0.5m to 25m available upon request, consult factory. 	Extension cords compatible with G6 connection option: RAL-020-001 = M23, PVC cable, 2m RAL-050-001 = M23, PVC cable, 5m RAL-100-001 = M23, PVC cable, 10m Extension cords compatible with G8 connection option: RAL-020-012 = M23, PUR cable, 2m RAL-050-020 = M23, PUR cable, 5m RAL-100-028 = M23, PUR cable, 10m Extension cords compatible with GM connection option: RAL-020-039 = M12 overmolded, PUR cable, 2m RAL-050-052 = M12 overmolded, PUR cable, 5m RAL-100-050 = M12 overmolded, PUR cable, 10m

Made in France

Page 6

Sensata Technologies, Inc. ("Sensata") data sheets are solely intended to assist designers ("Buyers") who are developing systems that incorporate Sensata products (also referred to herein as "components"). Buyer understands and agrees that Buyer remains responsible for using its independent analysis, evaluation and judgment in designing Buyer's systems and products. Sensata data sheets have been created using standard laboratory conditions and engineering practices. Sensata has not conducted any testing other than that specifically described in the published documentation for a particular data sheet. Sensata may make corrections, enhancements, improvements and other changes to its data sheets or components without notice.

Buyers are authorized to use Sensata data sheets with the Sensata component(s) identified in each particular data sheet. HOWEVER, NO OTHER LICENSE, EXPRESS OR IMPLIED, BY ESTOPPEL OR OTHERWISE TO ANY OTHER SENSATA INTELLECTUAL PROPERTY RIGHT, AND NO LICENSE TO ANY THIRD PARTY TECHNOLOGY OR INTELLECTUAL PROPERTY RIGHT, IS GRANTED HEREIN. SENSATA DATA SHEETS ARE PROVIDED "AS IS". SENSATA MAKES NO WARRANTIES OR REPRESENTATIONS WITH REGARD TO THE DATA SHEETS OR USE OF THE DATA SHEETS, EXPRESS, IMPLIED OR STATUTORY, INCLUDING ACCURACY OR COMPLETENESS. SENSATA DISCLAIMS ANY WARRANTY OF TITLE AND ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, QUIET ENJOYMENT, QUIET POSSESSION, AND NON-INFRINGEMENT OF ANY THIRD PARTY INTELLECTUAL PROPERTY RIGHTS WITH REGARD TO SENSATA DATA SHEETS OR USE THEREOF.

All products are sold subject to Sensata's terms and conditions of sale supplied at www.sensata.com SENSATA ASSUMES NO LIABILITY FOR APPLICATIONS ASSISTANCE OR THE DESIGN OF BUYERS' PRODUCTS. BUYER ACKNOWLEDGES AND AGREES THAT IT IS SOLELY RESPONSIBLE FOR COMPLIANCE WITH ALL LEGAL, REGULATORY AND SAFETY-RELATED REQUIREMENTS CONCERNING ITS PRODUCTS, AND ANY USE OF SENSATA COMPONENTS IN ITS APPLICATIONS, NOTWITHSTANDING ANY APPLICATIONS-RELATED INFORMATION OR SUPPORT THAT MAY BE PROVIDED BY SENSATA.

Mailing Address: Sensata Technologies, Inc., 529 Pleasant Street, Attleboro, MA 02703, USA.

CONTACT US

Americas

+1 (800) 350 2727 – Option 1
sales.beisensors@sensata.com

Europe, Middle East & Africa

+33 (3) 88 20 8080
position-info.eu@sensata.com

Asia Pacific

sales.isasia@list.sensata.com

China +86 (21) 2306 1500

Japan +81 (45) 277 7117

Korea +82 (31) 601 2004

India +91 (80) 67920890

Rest of Asia +886 (2) 27602006
ext 2808